


## INOA Bench

LIN4-60

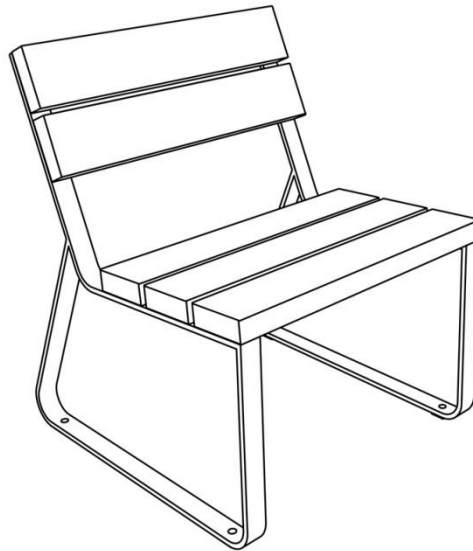

The picture is only illustrative, it may not exactly match the product described.

---

**Product description**

Steel weldment. The construction consists of two side rails welded from a bent strip 40 x 10 mm. A seat and backrest are made of solid wood attached to the supporting structure with stainless screws. The seat and backrest consist of 5 rectangular (117 x 52 mm) lathes of length 600 mm.

---

**Material**

Construction: steel grade 11  
Solid wood: spruce, oak, wood pine ThermoWood®

[DOWNLOAD PDF SAMPLER >](#)

---

**Surface treatment**

Hot-dip zinc treated with powder coating in colour variations: RAL 7016 (anthracite grey), RAL 9005 (jet black), RAL 9006 (white aluminium), RAL 9007 (grey aluminium), RAL 9003 (white), RAL 3003 (red), RAL 6021 (green), shade of Corten (rusty).  
Other RAL shades according to RAL sampler on request only.  
Spruce – two-layer impregnation and lacquer mixed with water with beeswax  
Oak – treated with impregnation and a glaze with biocidal effect  
Thermally modified wood pine ThermoWood® – penetration coating for wood with UV protection

---

**Dimensions**

600×646×784 mm

---

**Anchoring**

Anchoring is done with four stainless steel threaded rods M10 of length min. 200 mm and four nut cover caps M10 with a chemical anchor into concrete foundations prepared in advance.  
A detailed drawing is available for download on the website for each particular product.

---

